TOYOTA LC 79 STD - E1 AT P 4.0

BEIGE / BROWN 2026

TOYOTA

TOYOTA
V6
4WD

DUNLOP
SP QUALITIES

DUNLOP
SP QUALITIER
DO NOT MOUNT ON 16.5 INCH RIMS.
225/95R16C 118/116S
8PR.

TOYOTA LANDCRUISER

LAND CRUISER

TOYOTA
LAND CRUISER

TOYOTA
LANDCRUISER

TOYOTA
V6
4WD

TOYOTA
V6
4WD

SP QUALIFIER
DUNLOP

تحذير
Z
يتعين عليك إبطال التروس التفاضلية
• لا تستخدمه إلا لتحرير السيارة إذا كانت عالقة وتحتاجها من الطين أو الوحل أو الحشائش الطويلة.
• لا يستخدم DIFF LOCK (إبطال التروس التفاضلية) بسرعات أقل من 5 أميال بالساعة (8 كم/ساعة).
• لا تقم بتشغيل مفتاح DIFF LOCK (إبطال التروس التفاضلية) أثناء دوران العجلات في مكانها وذلك لتفادي تعرضها للخطر.
• إبطال التروس التفاضلية على الطرقات المعبدة يتطلب بذل جهد أكبر لتوجيه وتحكم دقيق عند الانعطاف.
• يصبح التحكم بجهة القيادة صعب عندما يتم تشغيل FRONT DIFF LOCK (إبطال التروس التفاضلية الأمامية)
• عوض على إعادة إبطال جميع التروس التفاضلية بعد أن يتم تحرير السيارة.
• رفع دليل تشغيل خاص من الكفالات

L R
MIRROR

AIRBAG
LAND CRUISER

LAND CRUISER
F
SUB
E
F
E
C
H
0
20
40
60
80
100
120
140
160
180
200
km/h
P
ODO
15 km
J86

MODE
HOLD
SRS
AIRBAG
L R
MIRROR
km/h

MIRROR
km/h
AIRBAG

SRS AIRBAG

LAND CRUISER
:00
3:07
H
M
CAUTION
Drive safely and obey traffic rules.
Watching this screen and making selections while driving can lead to a serious accident.
Read safety instructions in your Owner's manual.
Continue
Language
TOYOTA
OFF-LO
A/C
HI
DIFF LOCK
SUB
PWR HAUL
2nd START
OFF
SET
km/h

P
R
N
+
M
-
D
-

SET
SUB
OFF
PWR
HAUL
2nd
START
M
H2
H4
N
L4
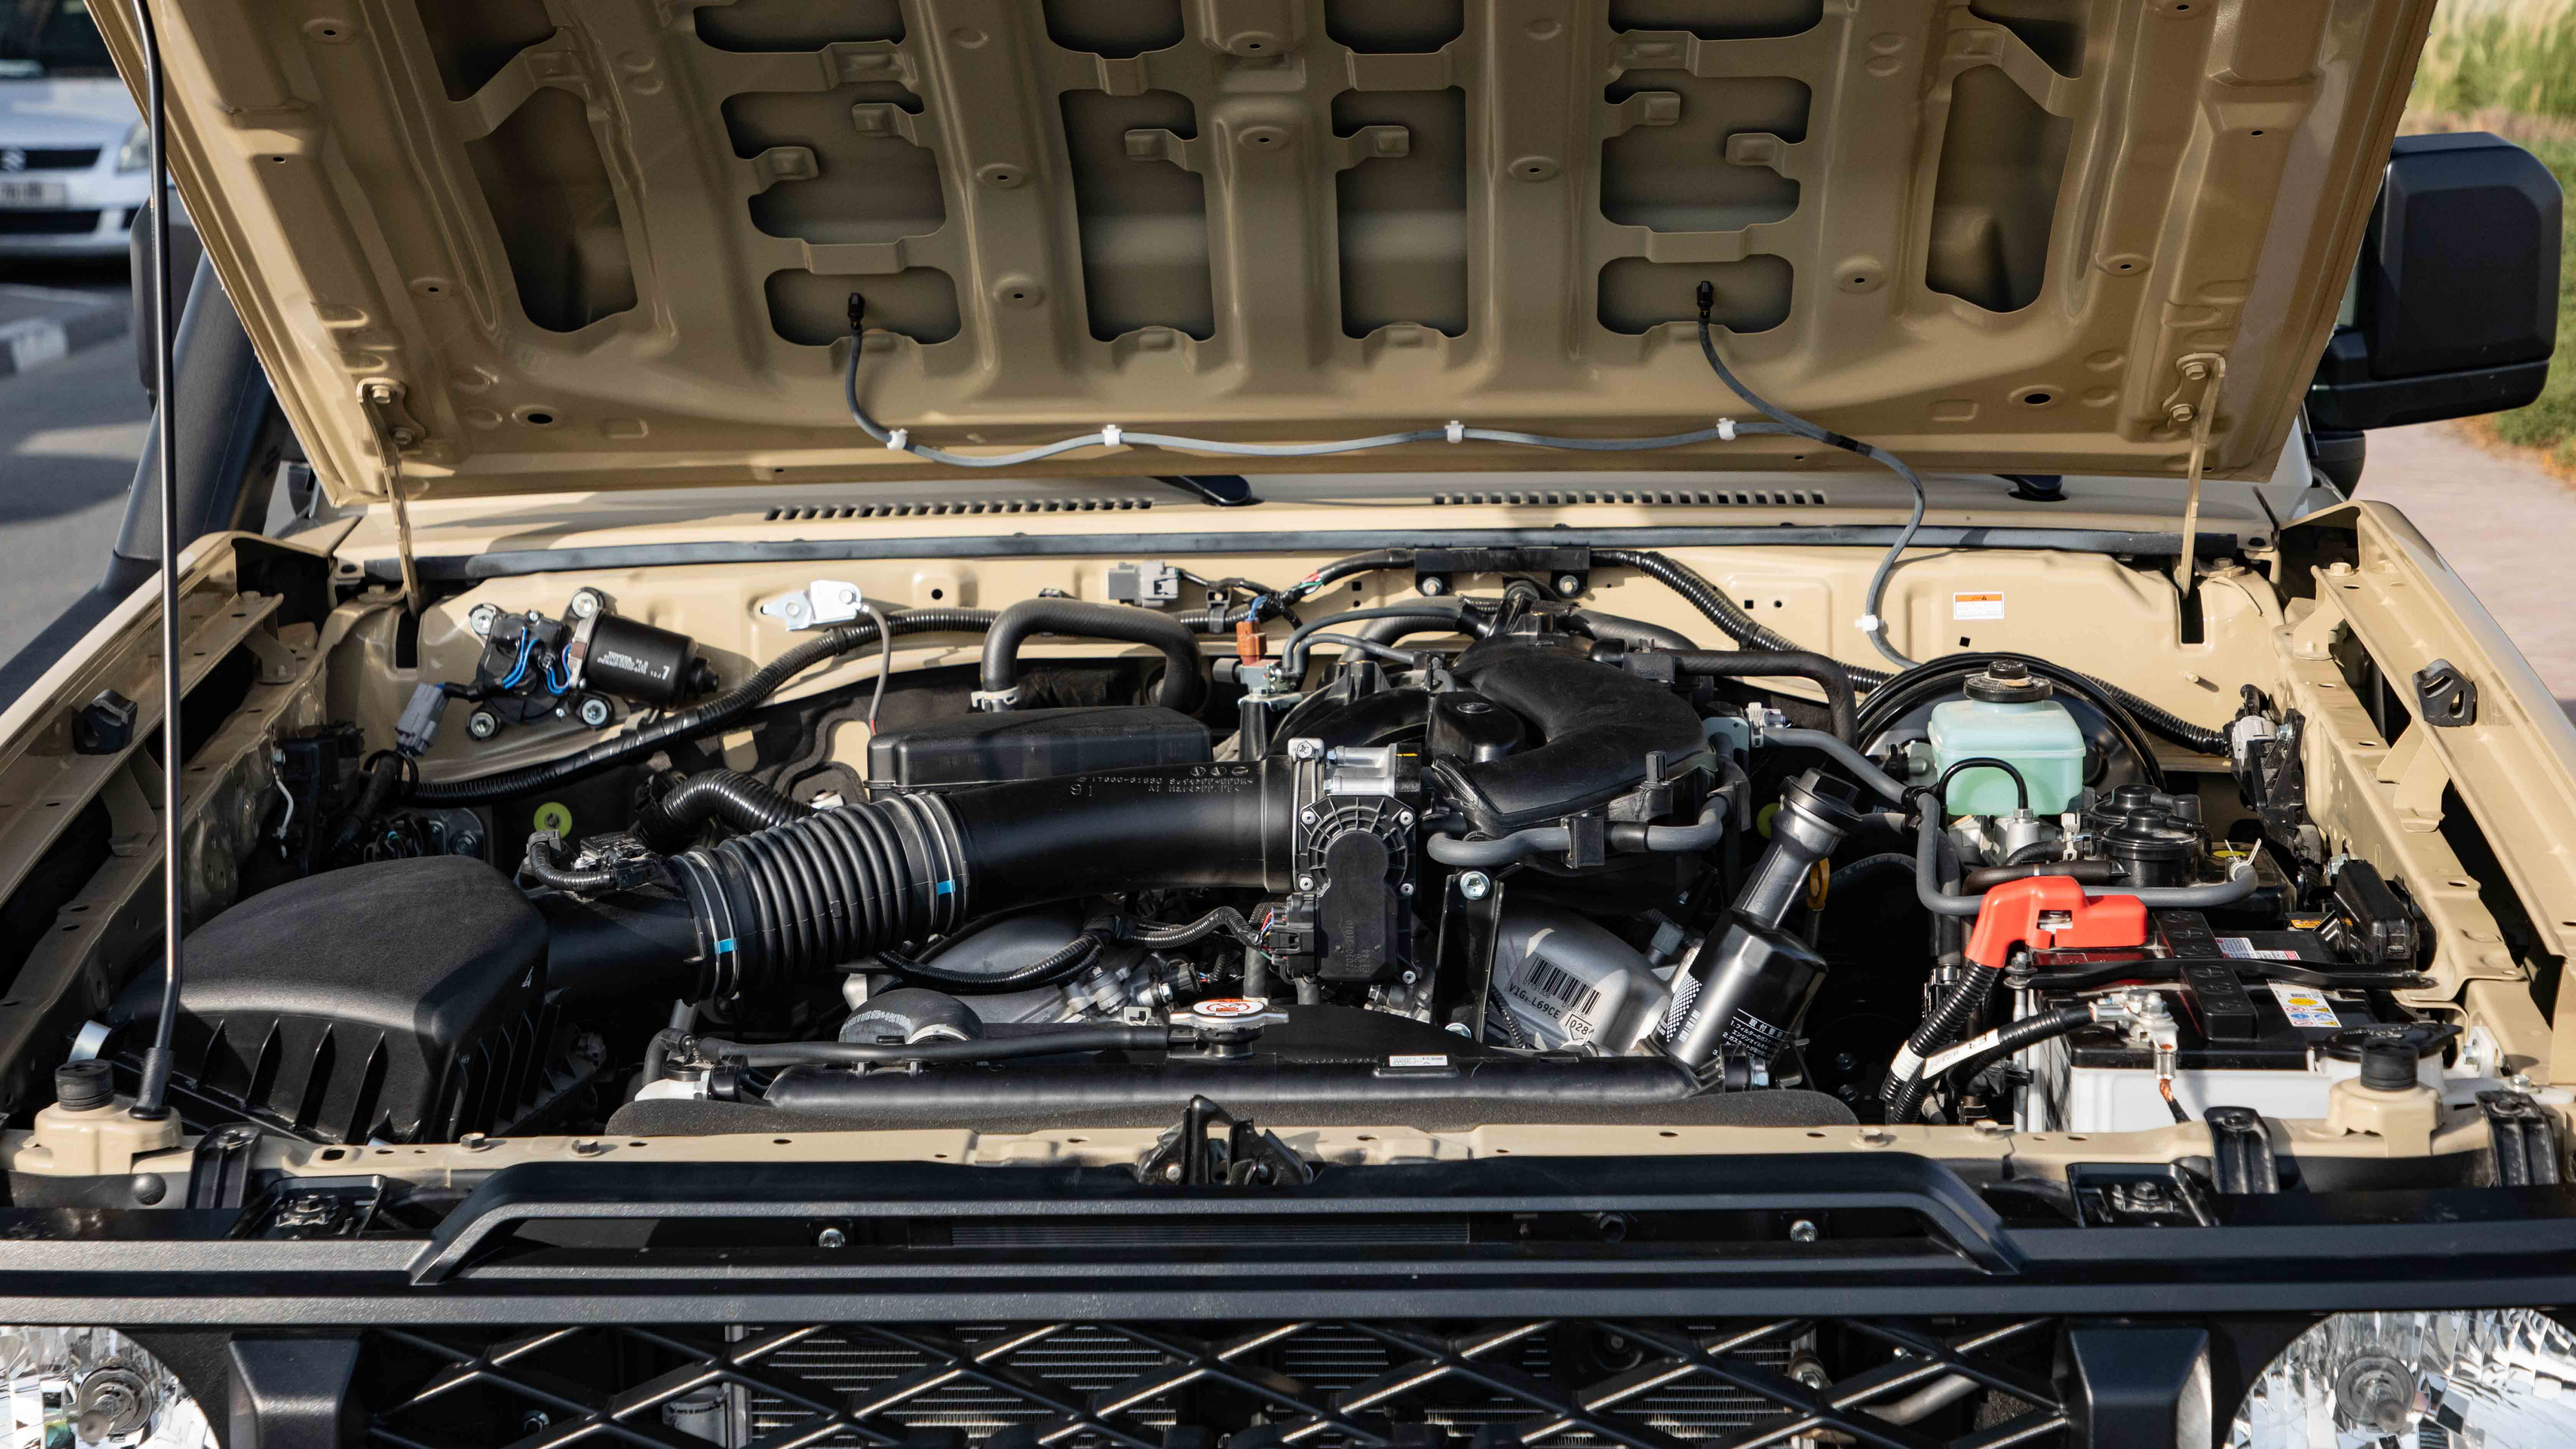
HI
SUB
OFF
PWR
HAUL
2nd
START
P
R